

MyPBX U100&U200 Application Firmware Update

(Please check the Hardware Version before update)

Date: 2014-07-02

1.1 For Hardware Version: MyPBX-U100&U200	2
1.1.1 Update through TFTP.....	2
1.1.2 Update through HTTP.....	3

1.1 For Hardware Version: MyPBX-U100/U200

You can update firmware through the following two ways:

1.1.1 Update through TFTP

Step 1: Download the update file. (e.g. 15.19.0.29.bin)

Download link: http://www.yeostar.com/download/MyPBX-U100_U200/15.19.0.29.bin

Step 2: Create tftp Server (For example, tftpd on Windows)

1) Install tftpd32 software on computer

Download link: http://tftpd32.jounin.net/tftpd32_download.html

2) Configure tftpd32

On option 'Current Directory', click 'Browse' button, choose the firmware file of MyPBX upgraded patch, such as C:\Image\15.19.0.29.bin

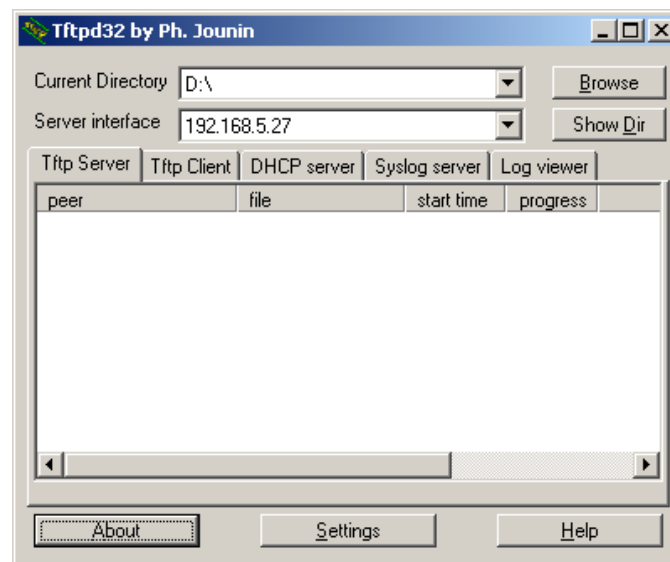


Figure 1-1

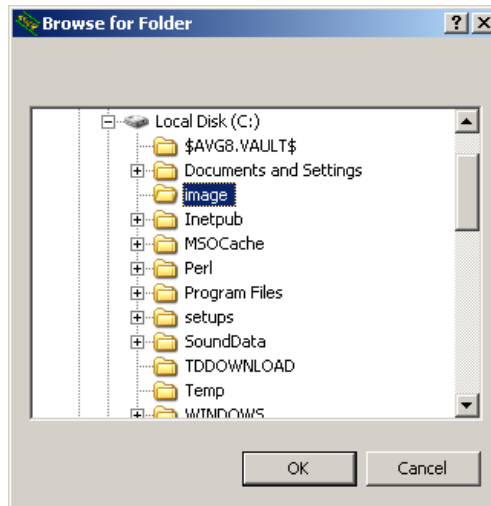


Figure 1-2

Step 3: On MyPBX configuration page, select **System Settings**→**Firmware update**→**Download Image From A** , choose 'TFTP Server':

- 1) TFTP Server: fill in IP address of tftpd32 server, such as 192.168.5.27
- 2) File Name: enter the name of firmware update, such as 15.19.0.29.bin
- 3) Click 'Start' to upgrade

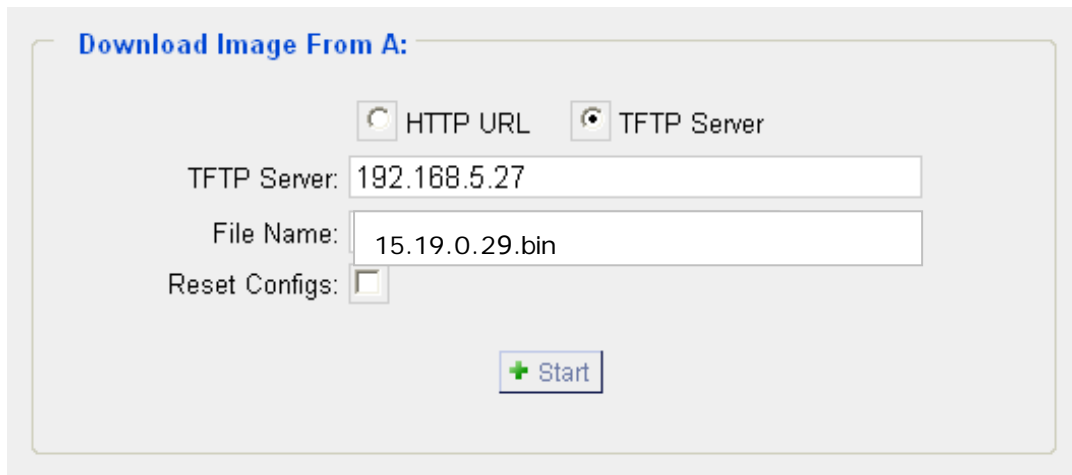


Figure 1-3

1.1.2 Update through HTTP

On MyPBX's configuration page, select **System Settings** → **Firmware update** →**Download Image From A** , choose 'HTTP Server':

- 1) HTTP URL: enter the update image file download link.
Example: http://www.yeostar.com/download/MyPBX-U100_U200/15.19.0.29.bin
- 2) Click 'Start' to upgrade

Note:

1. If enabled 'Reset configs', MyPBX will restore to factory default settings.

2. If you failed to upgrade through HTTP, please try again by TFTP way.
3. If you failed again through TFTP upgrade way, please turn off your computer's firewall, and then retransfer.

If the update is successful, you will see the version info on system information.

[End]